


VER	SLEEK 111x1 QRLED	SLEEK 111x2 QRLED
L	245 mm	440 mm
M	50 mm	60 mm

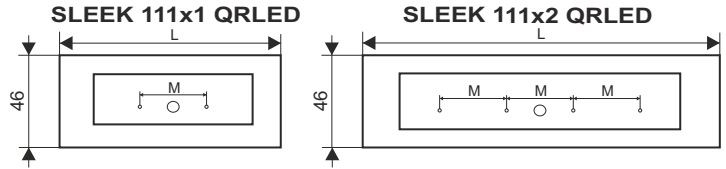

1

Diagram showing the mounting bracket being attached to the wall with screws (I) and a screwdriver (II).

2

Diagram showing the screws being tightened into the bracket. A warning icon shows a lightning bolt and the word "OFF".

3

Diagram showing the wiring being connected to the terminal block. A circular inset shows a close-up of the terminal block with labels L, N, and a ground symbol. The word "push" is used to indicate the connection. A warning icon shows a lightning bolt and the word "ON".

4

Diagram showing the final installation of the light fixture into the ceiling. A warning icon shows a lightning bolt and the word "ON".

Źródło światła zastosowane w tej oprawie oświetleniowej powinno być wymieniane wyłącznie przez producenta lub jego przedstawiciela serwisowego, lub podobnie wykwalifikowaną osobę.
 The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.



Ten produkt zawiera źródła światła o klasie efektywności energetycznej D.
 This product contains a light sources of energy efficiency class D.

LED
int